



1-01532576  
PCT/GB 2003 / 0 0 5 0 1 6



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 19 DEC 2003	
WIPO	PCT


**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

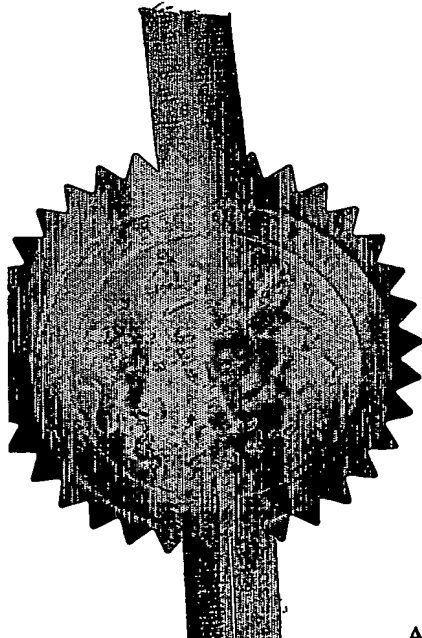

Signed *Andrew Gersay*  
Dated 9 December 2003

**BEST AVAILABLE COPY**

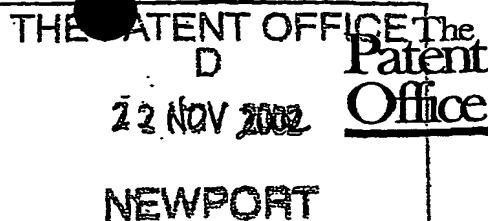
22NOV02 E75509-1 002831  
P01/7700 000-0227267.2

1/77

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference	57.0520 GB NP		
2. Patent application number (The Patent Office will fill in this part)	0227267.2		
3. Full name, address and postcode of the or of each applicant ( <u>underline all surnames</u> )	Schlumberger Holdings Limited P.O. Box 71 Craigmuir Chambers Road Town Tortola British Virgin Islands		
Patents ADP number (if you know it)	7236326001		
If the applicant is a corporate body, give the country/state of its incorporation	British Virgin Islands		
4. Title of the invention	APPARATUS AND METHOD FOR ANALYSING DOWNHOLE WATER CHEMISTRY		
5. Name of your agent (if you have one)	Christophe MACQUET Intellectual Property Law Department Schlumberger Cambridge Research Limited High Cross Maddingley Road Cambridge CB3 0EL United Kingdom		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)			
Patents ADP number (if you know it)	8686829001		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

# Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form -

Description 11

Claim(s) 2

Abstract 1

Drawing(s) 2

22

87

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 1 (plus 8 copies)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) 1

Any other documents -  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

21 November 2002

12. Name and daytime telephone number of person to contact in the United Kingdom  
Christophe Macquet  
01223 325268

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

APPARATUS AND METHOD FOR ANALYSING DOWNHOLE WATER CHEMISTRYField of the Invention

The present invention relates to an apparatus and method for downhole water chemistry analysis.

5 Background of the Invention

Well operators commonly need to understand downhole water chemistry to help them decide production strategies and determine corrosion rates, scale formation rates, formation geochemistry etc.

- 10 More specifically, the pH and qualitative/quantitative analysis of the presence of specific ions in downhole water are often required.

Conventionally, water chemistry measurements are performed in the laboratory on fluid samples retrieved from below ground.

- 15 However, water chemistry is not often preservable over the temperature and pressure changes typically induced by transportation from subterranean locations to the surface, and so a chemistry measurement of a sample collected for laboratory analysis will not always provide a result that can  
20 be related to the downhole value. Consequently, the water chemistry measured in the laboratory may vary significantly from that existing downhole.

Summary of the Invention

- 25 An object of the present invention is to provide a more reliable analysis of downhole water chemistry.

Accordingly, in a first aspect, the present invention provides an apparatus for analysing water chemistry, the apparatus being adapted to operate downhole and comprising:

a colouring agent supply device for supplying a colouring agent to a water sample, the colour of the water sample thus supplied being indicative of the water sample chemistry, and

5 a colorimetric analyser arranged to determine the colour of the water sample.

An advantage of the apparatus is that it allows *in situ* analysis to be performed, thereby avoiding the problems associated with transporting water samples to the surface. The present invention is at least partly based on the  
10 realisation that colorimetric analysis is a technique that can be adapted for performance downhole, i.e. in relatively demanding and hostile conditions.

In one embodiment the apparatus is installed downhole (e.g. in a hydrocarbon well or an aquifer).

15 Preferably the colorimetric analyser is connected to a processor for determining the water sample chemistry from the colour of the water sample. The processor may also be adapted for use downhole, or alternatively it may be intended for remote installation e.g. at the surface. For example the  
20 processor may be a suitably programmed computer.

The water sample colour may be indicative of e.g. water pH or a selected ion concentration level.

In one embodiment the colorimetric analyser comprises a spectrometer. An advantage of a spectrometer-based approach  
25 to colour analysis is that it has the potential to provide fast answers to questions of pH, corrosion chemistry and scale formation, which can be crucial for deciding e.g. completion design and materials and scale treatment programs.

A further aspect of the present invention provides for the use of the apparatus of the previous aspect for *in situ* analysis of downhole water chemistry.

5 In another aspect the present invention provides a method for analysing downhole water chemistry, the method comprising the steps of:

(a) supplying a colouring agent to a downhole water sample, the colour of the water sample thus supplied being indicative of the water sample chemistry, and

10 (b) determining the colour of the water sample,  
wherein steps (a) and (b) are performed *in situ*.

In another aspect the present invention provides a method for monitoring contamination of downhole water, the method comprising the steps of:

15 (a) adding a tracer agent to a fluid which is a potential contaminant of the downhole water,

(b) supplying a colouring agent to a sample of the downhole water, the colour of the water sample thus supplied being indicative of the presence of the tracer agent, and

20 (c) determining the colour of the water sample,  
wherein steps (b) and (c) are performed *in situ*.

The potential contaminant may be drilling mud filtrate. The downhole water may be either connate or injected water.

#### Brief Description of the Drawings

25 Specific embodiments of the present invention will now be described with reference to the following drawings in which:

Figure 1 shows a schematic diagram of a Live Fluid Analyser installed on a flow line,

Figure 2a shows the room temperature absorbance spectra of (a) the acid form of phenol red, (b) the base form of phenol red, (c) phenol red in a pH 8 solution, and (d) a weighted sum of the acid and base form spectra fitted to the pH 8 solution absorbance spectrum,

Figure 2b shows graphs of base fraction of phenol red (right hand vertical axis) and calculated pH (left hand vertical axis) as functions of prepared solution pH,

Figure 3a shows the room temperature absorbance spectra obtained from (a) phenol red in deionised water and (b) phenol red in deionised water after heat treatment at 150°C for 24 hours, and

Figure 3b shows the absorbance spectra obtained from (a) phenol red in a pH 7.4 buffer solution at 22°C and (b) phenol red in the pH 7.4 buffer solution at 150°C.

#### Detailed Description of the Invention

In general terms, the present invention relates to downhole colorimetric analysis. A preferred approach for the determination of pH and detection of the presence of specific ions involves injecting a specific indicator or reagent into a sample of water and determining the resulting colour of the fluid with an optical spectrometer.

Ions of interest for detection include those of Ca, Ba, Sr, Al, Cl, F, Fe, Mg, K, Si, Na, and ions containing sulphur and carbon (for example carbonate, bicarbonate, sulphate). Use of colorimetric and spectrometric analysis along with procedures and reagents required to determine the presence/quantity of some of these ions have been described in the literature (Vogel, A. I., *Text-Book of Quantitative Inorganic Analysis*,

3<sup>rd</sup> Edition, Chapter 10, John Wiley, 1961; Sandell E. B.,  
*Colorimetric Determination of Traces of Metals*, 3<sup>rd</sup> Edition,  
Interscience Publishers, 1959). However, we propose, for the  
first time, the application of these methods, in a downhole  
5 environment, to the analysis of downhole water as found in oil  
and gas fields, as well as aquifers. Typical temperatures and  
pressures found in a downhole environment are in the range of  
125°C and 10,000 psi, respectively; however they can go up to  
as high as 175°C and 20,000 psi.

10 To perform quantitative measurements of pH or ion  
concentration, the optical absorption of the unknown species  
can be determined either relative to a standard solution  
(which could be the water sample itself prior to  
indicator/reagent addition) or with a stable and previously  
15 calibrated spectrometer.

Desirably, the spectrometer should be capable of operating  
over the visible spectrum of 400 to 760 nm, which is from  
ultraviolet to infrared respectively.

In one embodiment we propose fitting a known Modular Dynamic  
20 Tester (MDT) with a Live Fluid Analyzer (LFA) module (R.J.  
Andrews et al., *Oilfield Review*, 13(3), 24-43). The LFA would  
inject coloured indicators to the water flowing through the  
MDT so that pH can be determined. It can also add suitable  
reagents to the water for determination of the  
25 presence/concentration of selected ions.

Figure 1 shows a schematic diagram of the LFA installed on a  
flow line 1, the other parts of the MDT not being shown. An  
arrow indicates the direction of water flow in the flow line.  
The LFA has an upstream dye injector 6 and a downstream  
30 optical analyser 2. The analyser comprises a light source 3  
on one side of the flow line and a facing light detector 4 on



the opposite side of the flow line. When a preselected indicator or reagent 5 is injected into flow line it mixes with the water and is carried downstream to the analyser, whereupon the detector generates a signal indicative of the colour of the water. If required a mixer, not shown in the figure, such as a double helix, can be used to promote mixing of the water and dye. A processor (not shown) then determines the water chemistry from the signal e.g. using approaches discussed below.

- 10 Such colorimetric analysis also allows contamination of formation water by water-based mud filtrate to be detected. This can be achieved by suitable indicator/reagent selection such that the water-based mud filtrate and formation water generate different respective colours.
- 15 Another option is to add a tracer ion or other species (for example, nitrate, iodide or thiocyanate ions) to the drilling fluid. A reagent can then be used in the LFA, which produces a colour change in the presence of the tracer so that the tracer can be detected and preferably quantified. In this way
- 20 real-time monitoring of connate water for contamination by the filtrate can be achieved.

A possible reagent for detecting iodide is the iodobismuthite ion, formable from a solution of bismuth in dilute sulphuric acid. This ion gives a yellow orange colouration and is

25 sensitive up to 1% iodide ( Vogel, A. I., *Text-Book of Quantitative Inorganic Analysis*, 3<sup>rd</sup> Edition, Chapter 10, p803 John Wiley, 1961).

We now describe how indicator colouration can be used to measure pH. However, similar considerations apply when the

30 colour of any reagent is being used to measure ion concentration.

For pH measurements the choice of indicator depends to a significant extent on the accuracy with which the pH is required. As an example, we take a universal indicator, a volume of which has been injected into the sample flowline upstream of the optical detector. The indicator volume is determined by the flow rate of the water and intensity of the colour and is usually a small fraction of the total volume. The universal indicator may be formed e.g. from a mixture of 0.2 g of phenolphthalein, 0.4 g methylred, 0.6 g dimethylazobenzene, 0.8 g bromothymol blue, and 1 g of thymol blue in 1 l ethanol. To this solution is added NaOH(aq) until the solution appears yellow. The colours of the solution as a function of pH are listed in the table below (Vogel, A. I., *Text-Book of Quantitative Inorganic Analysis*, 3<sup>rd</sup> Edition, Chapter 1.30, p59 John Wiley, 1961).

pH	2	4	6	8	10	12
Colour	Red	Orange	Yellow	Green	Blue	Purple

An alternative is to use a plurality of indicators each of which is specific to a respective pH range. This may result in a more precise determination of pH.

The pH of an unknown solution may be obtained using the equation below (R.G. Bates, *Determination of pH: Theory and Practice*, Chapter 6, John Wiley, 1964):

$$pH = pK_a + \log \frac{\gamma_B}{\gamma_A} + \log \frac{B}{A} \quad (1)$$

where  $K_a$  is the thermodynamic equilibrium constant for the indicator and is a function of temperature; A and B are the respective fractions of the acid and base forms of the indicator; and  $\gamma_A$  and  $\gamma_B$  are respective activity coefficients of the acid and base forms of the indicator, and depend on ionic

strength of the solution and temperature. Both  $K_a$  and activity coefficients could be weak functions of pressure as well.

The fraction of the indicator that exists in the acid form (A) and base form (B) may be measured spectroscopically. The absolute concentration of the dye does not appear in the equation and hence the pH calculation is independent of the volume of dye injected or the flow rate of the water stream as long as the concentration is such that Beer's law is satisfied. The functional dependence of  $K_a$  on temperature (T) has been studied and measured for a number of reactions and a general equation that can describe this dependence is (D. Langmuir, *Aqueous Environmental Geochemistry*, Chapter 1, Section 1.6.2, Prentice Hall, 1997):

$$\log K_a = a + bT + \frac{c}{T} + d \log T + eT^2 \quad (2)$$

The parameters in this equation may be obtained by calibration in the laboratory over the desired temperature range using standard buffers of known pH. Dependence on pressure may also be obtained through experimental calibration if necessary. Several models have been proposed for activity coefficient estimation. For example, the Debye-Huckel equation is commonly used for low ionic strength solutions and the Pitzer model at higher ionic strengths (D. Langmuir, *Aqueous Environmental Geochemistry*, Chapter 4, Section 4.2, Prentice Hall, 1997). Ionic strengths can be derived from downhole water sample conductivity/resistivity measurements as is done in the MDT or alternatively from other wireline measurements such as resistivity logs. For very dilute solutions and/or for acid and base forms that have similar behaviours, the activity coefficient term may be neglected. Thus equation (1) provides a means for determining pH under downhole conditions for most

temperatures, pressures and ionic strengths encountered in practice.

As an example, Figure 2a shows the room temperature absorbance spectra of (a) the acid form of phenol red and (b) the base form of phenol red. The acid form has a peak at about 432 nm and the base form at about 559 nm. Figure 2a also shows (c) the measured absorbance spectrum of phenol red in a pH 8 solution, and (d) a weighted sum of the acid and base form spectra fitted to the measured absorbance spectrum, the weightings providing the base and acid fraction of phenol red in the pH 8 solution.

Similar analyses can be performed for solutions prepared with different pH levels. Figure 2b shows a graph of base fraction of phenol red (right hand vertical axis) as a function of prepared solution pH (horizontal axis). Using equation (1) it is then possible to calculate the pH of each solution. The calculated pH values (left hand vertical axis) are also plotted on Figure 2b. They show that, in this example, pH determined by spectroscopy is highly accurate for phenol red base fractions in the range of about 0.05 to 0.95 corresponding to pH values from 6.5 to 9. The range of pH measurement can be increased to 6 to 9.5 if the acid and base fractions can be spectroscopically detected at lower levels of 0.02.

The accuracy of the pH measurement is higher when the pH is close to the pKa value and decreases when the pH departs from the pKa. Thus, if the likely pH range is known, an indicator can be selected which has a pKa value such that a desired level of accuracy can be achieved. A combination of indicators may be chosen to cover the pH range typically expected in formation waters. In this way, provided the

optical analyser has suitable wavelength windows to observe the colour changes, the pH can be obtained to within a value of a few tenths. Depending on how the indicators interact with each other, multiple injectors in series or parallel may  
5 be used for the different indicators or a single injector with a mixed indicator solution may be deployed.

The analysis may be performed using a stable and calibrated colorimeter/spectrophotometer. Alternatively, the absorbance spectra of the water sample in the flow line prior to  
10 indicator injection can yield the baseline. Yet another option is to use a reference solution to calibrate the colorimeter/spectrophotometer. The last two options provide a means of compensating for any possible inherent water colour.

Further improvements may be obtained if a series of buffer  
15 reference solutions are supplied, each differing in pH e.g. by about 0.2 and covering the range around the expected pH value. Indicator is then added to known volumes of the buffer solution and the water sample and the colours compared to determine the pH. To ensure accuracy, preferably the water  
20 sample is a captured sample.

For downhole use, the indicator should be stable and chemically active at the temperatures expected downhole. As an example, Figure 3a shows the room temperature absorbance spectra obtained from (a) phenol red in deionised water and  
25 (b) phenol red in deionised water after heat treatment at 150°C for 24 hours. The heat treatment results in only a 10% loss in absorbance, demonstrating that the phenol red indicator can survive prolonged exposure to temperatures of up to 150°C.

30 However, it may be necessary to calibrate each indicator/reagent for the different temperatures and ionic

strengths to which it will be exposed downhole. Figure 3b shows the spectra obtained from (a) phenol red in a 7.4 pH buffer solution at 22°C and (b) phenol red in the 7.4 pH buffer solution at 150°C. At 150°C the phenol red is still  
5 chemically active, the increase in base fraction at the higher temperature being due to changes in pKa and the pH of the buffer solution with temperature.

While the invention has been described in conjunction with the exemplary embodiments described above, many equivalent  
10 modifications and variations will be apparent to those skilled in the art when given this disclosure. Accordingly, the exemplary embodiments of the invention set forth above are considered to be illustrative and not limiting. Various  
15 changes to the described embodiments may be made without departing from the spirit and scope of the invention.

Claims

1. An apparatus for analysing water chemistry, the apparatus being adapted to operate downhole and comprising:

5 a colouring agent supply device for supplying a colouring agent to a water sample, the colour of the water sample thus supplied being indicative of the water sample chemistry, and a colorimetric analyser arranged to determine the colour of the water sample.

10 2. An apparatus according to claim 1 which is installed downhole.

3. An apparatus according to claim 1 or 2 wherein the colorimetric analyser is operably connected to a processor which determines the water sample chemistry from the colour of the water sample.

15 4. An apparatus according to any one of the previous claims wherein the colorimetric analyser comprises a spectrometer

5. Use of the apparatus of any one of the previous claims for *in situ* analysis of downhole water chemistry.

20 6. A method for analysing downhole water chemistry, the method comprising the steps of:

(a) supplying a colouring agent to a downhole water sample, the colour of the water sample thus supplied being indicative of the water sample chemistry, and

25 (b) determining the colour of the water sample, wherein steps (a) and (b) are performed *in situ*.

7. A method for monitoring contamination of downhole water, the method comprising the steps of:

(a) adding a tracer agent to a fluid which is a potential contaminant of the downhole water,

(b) supplying a colouring agent to a sample of the downhole water, the colour of the water sample thus supplied being indicative of the presence of the tracer agent, and

(c) determining the colour of the water sample,

5 wherein steps (b) and (c) are performed *in situ*.

8. An apparatus for analysing water chemistry as herein described with reference to and as shown in the accompanying drawings.



## ABSTRACT

The invention concerns an apparatus for analysing water chemistry. According to the invention, the apparatus is  
5 adapted to operate downhole and comprises a colouring agent supply device for supplying a colouring agent to a water sample, the colour of the water sample thus supplied being indicative of the water sample chemistry, and a colorimetric analyser arranged to determine the colour of the water sample.

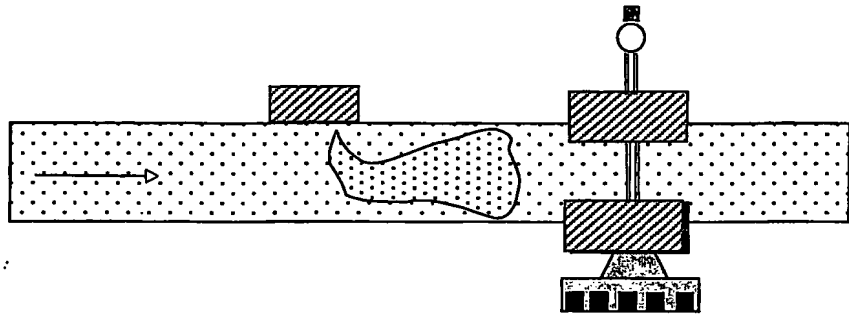


Fig. 1

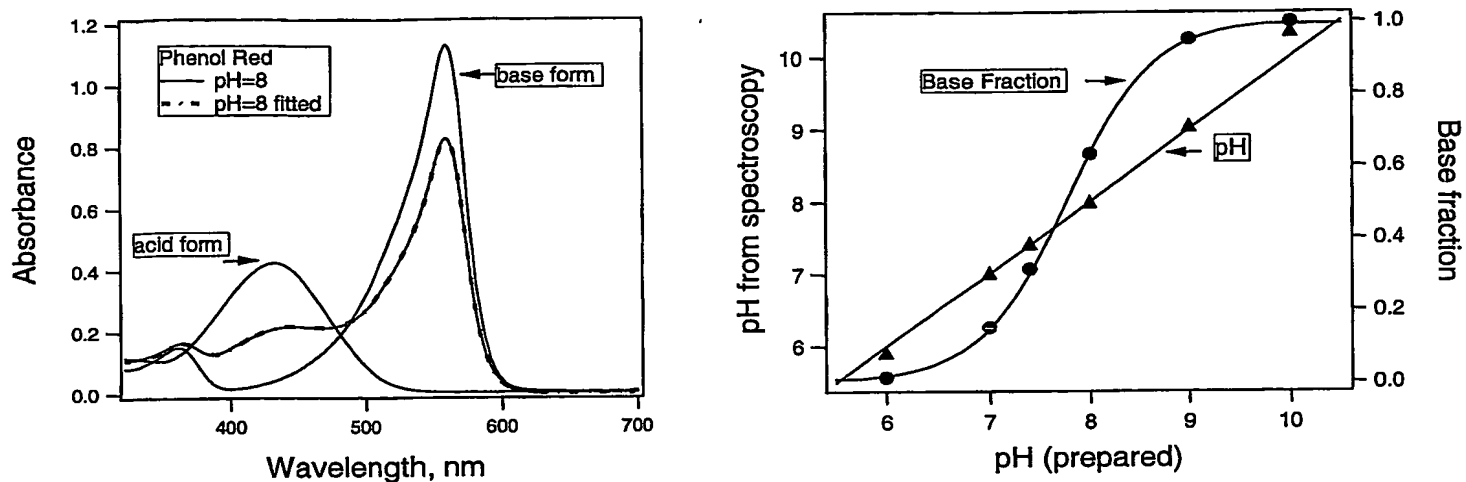


Fig. 2

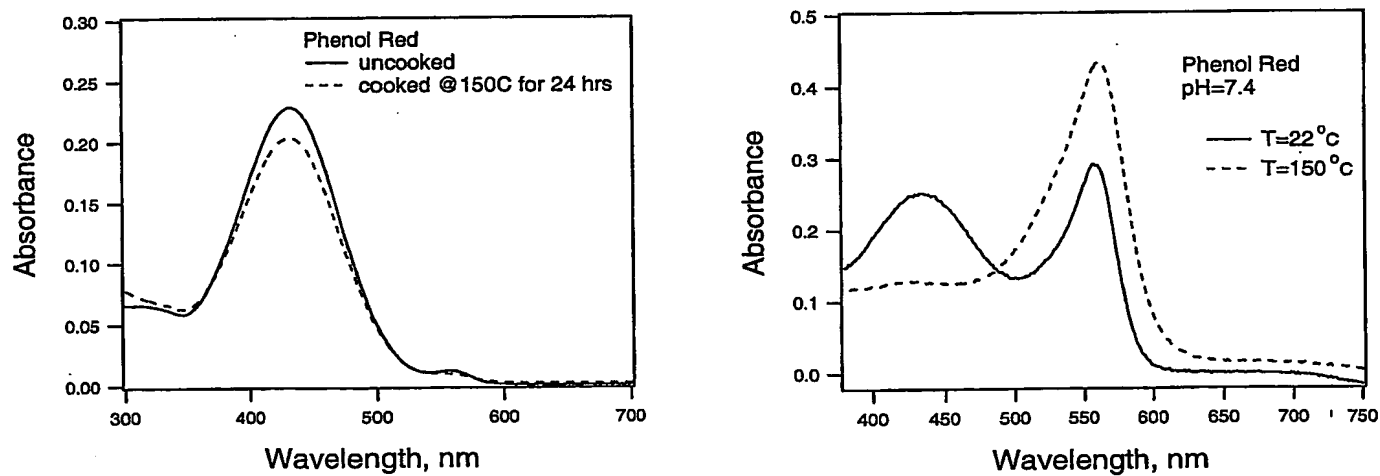


Fig. 3

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**